




Aqua Treatment Service, Inc.

# ENVIRO-SAFE SERIES

## U V S Y S T E M S

The *ATS Ultraviolet, Enviro-Safe Series*, is an effective way to provide safe, bacteria free water for your home or office, 24 hours a day, 7 days a week. *ATS's* Ultraviolet Disinfection Systems are setting the standards for water disinfection requirements in the water treatment industry.

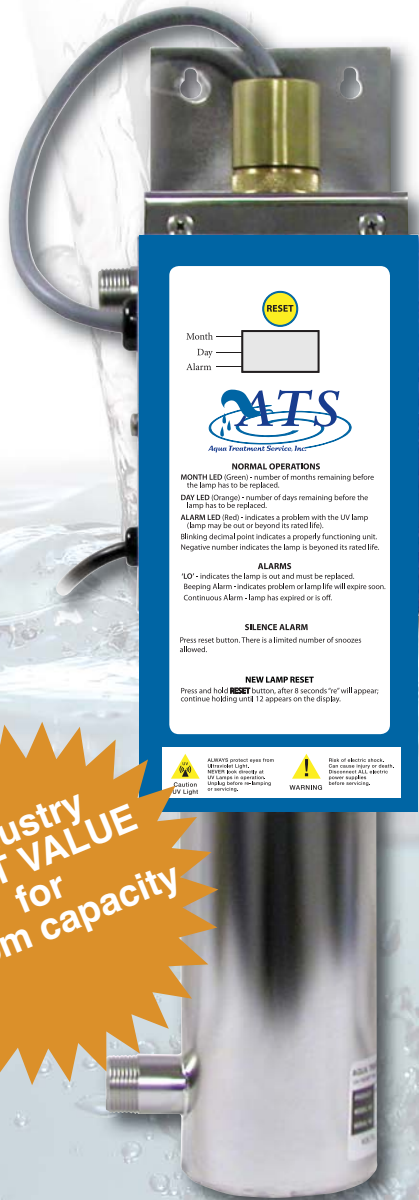

RESET

Month:

Day:

Alarm:

**ATS**  
Aqua Treatment Service, Inc.

**NORMAL OPERATIONS**  
MONTH LED (Green) - number of months remaining before the lamp has to be replaced.  
DAY LED (Orange) - number of days remaining before the lamp has to be replaced.  
ALARM LED (Red) - indicates a problem with the UV lamp (lamp may be out or beyond its rated life).  
Blinking decimal point indicates a properly functioning unit. Negative number indicates the lamp is beyond its rated life.

**ALARMS**  
"LO" - indicates the lamp is out and must be replaced. Beeping Alarm - indicates problem or lamp life will expire soon. Continuous Alarm - lamp has expired or is off.

**SILENCE ALARM**  
Press reset button. There is a limited number of snoozes allowed.

**NEW LAMP RESET**  
Press and hold RESET button, after 8 seconds "nt" will appear, continue holding until 12 appears on the display.

**CAUTION** UV light  
ALWAYS protect your eyes from ultraviolet light. Do not stare at or look into the lamp or the UV chamber. Do not touch the lamp or the chamber. Do not touch the lamp or the chamber. Do not touch the lamp or the chamber.

**WARNING**  
Risk of electric shock. Do not touch or clean, disconnect, or connect power cables, power switches, or other electrical components.

**Industry BEST VALUE for \$/gpm capacity**



**DESIGNED FOR:  
PERFORMANCE  
EFFICIENCY  
FLEXIBILITY**

- FEATURES:**
- Retrofit Master - Adapts to most existing and new flow schemes
  - Features: 304 SS chamber, High output UV lamps, LED screen explains alarm or warnings, built-in surge suppressor, fusible link, etc.
  - 8, 12, 20 gpm
  - Passivated and electropolished inside and out.

### SPECIFICATIONS:

Model#	Max. Flow GPM	No. Lamps	KW @ 120V	AMP @ 120V	Pipe Size	Overall Dimensions L x W x D	Wetted Material	Shipping Weight
EV - 8E	8	1	0.03	0.25	3/8" MIP	21" x 3.5" x 3.5"	304 SS	9 lbs.
EV - 12E	12	1	0.03	0.25	3/4" MIP	32" x 3.5" x 3.5"	304 SS	18 lbs.
EV - 20E	20	1	0.03	0.25	1" MIP	35" x 5" x 5"	304 SS	21 lbs.

**NOTES:** 220V Specs are available upon request

# ATS Ultraviolet Systems

A comprehensive range of options




EV and DWS Series




WQA Gold Seal Units  
"Certified to 50 gpm"



AS-V and As-H Series  
"Low Pressure High Output Amalgam Lamps"

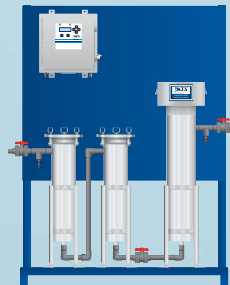

SKMB Series  
USEPA Validated, third party certified

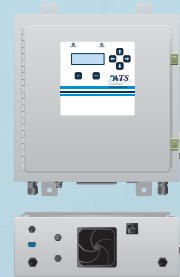

RLC Controller



Airpro Systems



194 Hempt Road, Mechanicsburg, PA 17050  
800 . 224 . 7476 fax: 800 . 787 . 0197  
www.aquat.com

All ATS Units are  
Proudly Made:  
in the  
U.S.A.



MEMBER

